

HyperDeck Studio HD Pro



The HyperDeck Studio HD Pro includes all the features of the Plus model but at a full rack width size, there's space for more features! The larger model has space for two SSD slots but still includes the two SD card slots of the smaller models. This means you can instantly move media cards between different models of HyperDeck Studio. You get the nice transport control buttons as well as a machined metal search dial with electronic clutch for limiting rotation when in shuttle mode. There are also dedicated buttons for jog, shuttle and scroll search dial modes. The rear panel has extra space so the timecode connections have been upgraded to XLR connectors.

\$995

Connections

SDI Video Inputs

1

Audio Output

1 x 6.35 mm headphone jack.

HDMI Audio Outputs

8 channels embedded audio.

SDI Video Outputs

2

Screen

2.2 inch LCD.

Remote Control

1 x RS-422 In, 1 x RS-422 Out.

SDI Monitor Outputs

1

Timecode Connections

1 x XLR In, 1 x XLR Out.

Recorder Configuration

Via user interface or Blackmagic HyperDeck Ethernet Protocol.

SDI Rates

270Mb, 1.5G, 3G, 6G.

Reference Connections

1 x BNC In, 1 x BNC Out.
Tri-Sync or Black Burst.

Ethernet

1Gb/s

HDMI 2.0 Video Inputs

1

SDI Audio Inputs

16 channels embedded audio.

Computer Interface

1 x USB Type-C 3.0 (up to 5Gb/s) for external drive recording, webcam out, software configuration and updates.

HDMI 2.0 Video Outputs

1

SDI Audio Outputs


16 channels embedded audio.

Built in Speaker

Mono

HDMI Audio Inputs

8 channels embedded audio.

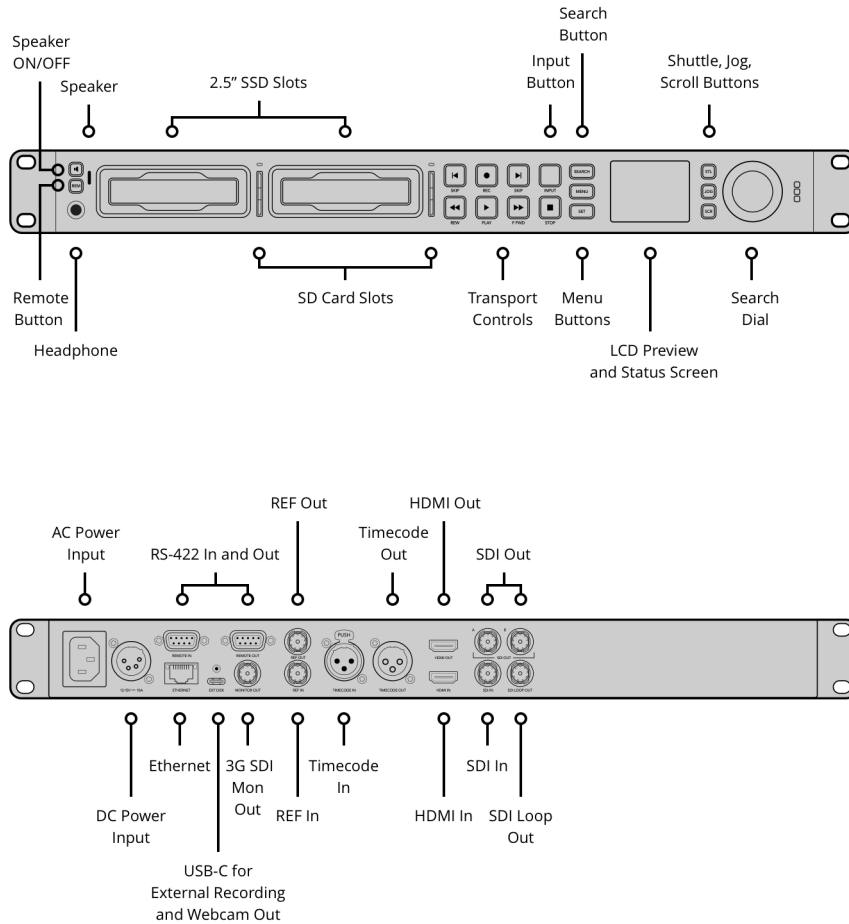

Standards

SD Video Standards

525i59.94 NTSC, 625i50 PAL

HD Video Standards

720p50, 720p59.94, 720p60
 1080i50, 1080i59.94, 1080i60
 1080p23.98, 1080p24, 1080p25,
 1080p29.97, 1080p30, 1080p50,
 1080p59.94, 1080p60
 1080PsF23.98, 1080PsF24,
 1080PsF25, 1080PsF29.97, 1080PsF30

2K DCI Video Standards

2Kp23.98 DCI, 2Kp24 DCI, 2Kp25 DCI,
 2Kp29.97 DCI, 2Kp30 DCI

Ultra HD Video Standards

2160p23.98, 2160p24, 2160p25,
 2160p29.97, 2160p30

4K DCI Video Standards

4Kp23.98 DCI, 4Kp24 DCI, 4Kp25 DCI,
 4Kp29.97 DCI, 4Kp30 DCI

SDI Compliance

SMPTE 259M, SMPTE 292M,
 SMPTE 296M, SMPTE 372M,
 SMPTE 424M, SMPTE 425M
 level A and B, SMPTE 2081-1,
 SMPTE 2081-10, SMPTE 2084 and
 SMPTE 2108-1.

SDI Metadata Support

HD RP188 and closed captioning
 CEA-708. HDR Metadata supported
 on SDI.

Supported HDMI Formats

525i59.94 NTSC, 625i50 PAL,
 720p50, 720p59.94, 720p60,
 1080i50, 1080i59.94, 1080i60,
 1080p23.98, 1080p24, 1080p25,
 1080p29.97, 1080p30, 1080p50,
 1080p59.94, 1080p60,
 2Kp23.98 DCI, 2Kp24 DCI, 2Kp25 DCI,
 2Kp29.97 DCI, 2Kp30 DCI,
 2160p23.98, 2160p24, 2160p25,
 2160p29.97, 2160p30,
 4Kp23.98 DCI, 4Kp24 DCI, 4Kp25 DCI,
 4Kp29.97 DCI, 4Kp30 DCI

Audio Sampling

Television standard 24-bit, 48 kHz
 sample rate.

Video Sampling

4:2:2 YUV

Color Precision

10-bit

Color Space

REC 601, REC 709, REC 2020. 33 point 3D LUTs can be applied to SDI monitor out.

HDR Support

Hybrid Log-Gamma, ST2084 300, ST2084 500, ST2084 800, ST2084 1000, ST2084 2000, ST2084 4000, ST2084.

Multi Rate Support

Auto detection of SD, HD and 6G-SDI.

Copy Protection

HDMI input is unable to capture from copy protected HDMI sources. Always confirm copyright ownership before capture or distribution of content.

Media

Media

2 x 2.5 inch disc slots 2 x SD card slots
1 x USB-C 3.0 expansion port for external recording of SD, HD, 2K DCI, Ultra HD and 4K DCI.

Please refer to either the Manual or the Information Note at www.blackmagicdesign.com/support for compatible media.

Media Type

SATA-II or SATA-III 2.5 inch solid state media. UHS-I and UHS-II SD cards.

Media Format

Can format media to ExFAT (Windows/Mac) or HFS+ (Mac) file systems.

Supported Codecs

ProRes HQ QuickTime, ProRes 422 QuickTime, ProRes LT QuickTime, ProRes Proxy QuickTime for all formats up to 2160p30. Playback only of ProRes 4444 QuickTime up to 1080p60 with auto routing of fill and key over SDI A and B outputs. DNxHD 220x, DNxHD 220x MXF, DNxHD 145, DNxHD 145 MXF, DNxHD 45, DNxHD 45 MXF for 720p and 1080p HD formats up to 60fps. DNxHR HQX, DNxHR HQX MXF, DNxHR SQ, DNxHR SQ MXF, DNxHR LB, DNxHR LB MXF for 2K DCI and 2160p formats up to 30fps. H.264 SDI 4:2:2 10-bit, H.264 High 4:2:0 8-bit, H.264 Medium 4:2:0 8-bit, H.264 Low 4:2:0 8-bit for all formats up to 1080p60.

Control

Built in Control Panel

16 buttons for transport and device control with search dial featuring electronic clutch and 2.2 inch color display.

External Control

RS-422 deck control, SDI start/stop, timecode run. Includes Blackmagic HyperDeck Ethernet Protocol. Supports remote FTP file upload.

Software

Software Included

Blackmagic OS Blackmagic HyperDeck Setup Internal Software Upgrade Loaded at system start, or via Blackmagic HyperDeck Setup using USB port.

Operating Systems



Mac 10.15 Catalina,
Mac 11.1 Big Sur or later.



Windows 10, 64-bit.

Displays

Built in 2.2 inch LCD for video, audio and timecode monitoring and menu settings.
LED bezel indicator lights around SSD media slots and LED indicator lights above the SD media slots.

Power Requirements

Power Supply

1 x Internal 100 - 240V AC 50/60Hz.
1 x 4 pin XLR 12V DC In for external
power supply or battery use.

Power Usage

100 W max.

Accessories


Optional Accessories

HyperDeck Extreme Control

Physical Installation

1 rack unit height.

Physical Specifications

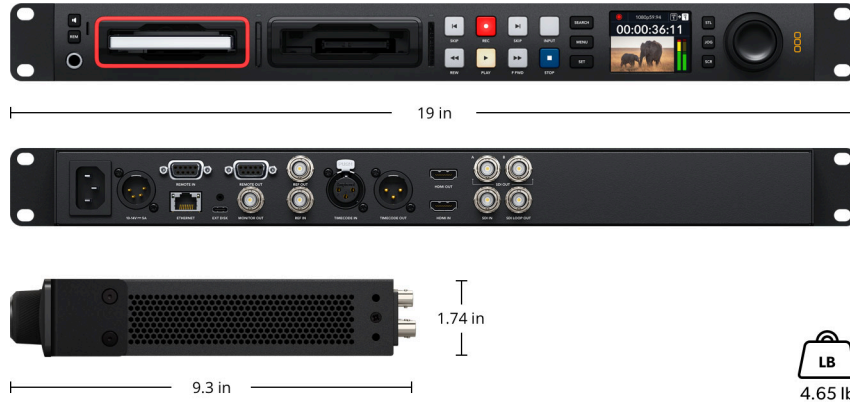

Environmental Specifications

Operating Temperature

0° to 40° C (32° to 104° F)

Storage Temperature

-20° to 60° C (-4° to 140° F)

Relative Humidity

0% to 90% non-condensing

What's Included

HyperDeck Studio HD Pro

Warranty

12 Month Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2021, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller