

F6 PLUSX

TOUCH 1600nit

5.5" High Bright 4K HDMI Monitor



5.5" 1920x1080



Touch Screen



Custom 3D LUT



4K HDMI In & Out



5V Type-C Power Supply



235g Light Design



Power for Camera




Dual-purpose Battery Plate



KEY FEATURES

- 5.5-inch 1920x1080 full HD IPS screen
- Touch screen menu operation, easy to use
- Custom 3D-LUT, preview film look
- With Waveform, Vector scope, RGB Histogram, Focus Assist, Monochrome etc. functions, can help you accurately exposure and focus every shot
- Stereo Earphone output
- DC 8V power out to power your DSLR camera or mirrorless camera.
- F970/LP-E6 dual purposed battery plate

USE PROFESSIONAL REC.709 COLOR CALIBRATION STANDARD

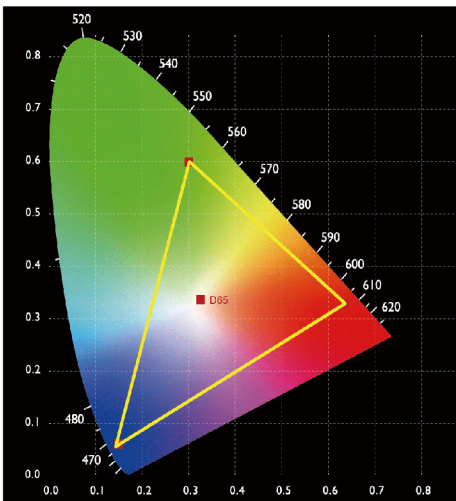

SMARTER TOOLS FOR ABSOLUTE PRECISION



3D LUT




Waveform



Vector Scope



Histogram



Anamorphic Mode



Peaking Filter



False Colors



Exposure




Zoom-in



Image Flip



Embedded Audio



Nine Grid

>> FLEXIBLE POWER SUPPLY MODE


>> SD CARD FIRMWARE UPDATE /LUT FILE IMPORTING





>> PARAMETER

Description	5.5" High Bright On-camera Monitor
Model	F6 PLUSX
Screen size	5.5" Touch Screen
Color Gamut	16.7M (8 bit)
Resolution	1920x1080 pixels
Dot pitch	0.069 (H) × 0.069 (W) mm
Aspect Ratio	16:9
Brightness	1600cd/m ²
Contrast	1000:1
Backlight	LED
Viewing Angle	80°/80°(L/R) 80°/80°(U/D)
Input	HDMI, SD Card
Output	HDMI
Audio	3.5mm Stereo Headphone
Power In	DC IN 12V, Barrel (5.5mm outer, 2.1mm inner), DC IN 5V (Type-C) <small>Note: please use 5V/2A or more than 2A Type-C power supply</small>
Power Out	DC OUT 8V, Barrel (5.5mm outer, 2.1mm inner; Power DSLR or mirrorless camera)
HDMI Input/ Output Support Format	480i/576i/480p/576p 1080i (60/59.94/50) 720p (60/59.94/50/30/29/25/24/23.98) 1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/23.98sF) 4K UHD 3840 × 2160p (30/29.97/25/24/23.98Hz), 4096 × 2160p (24Hz)
Power Consumption	≤10W
Input Voltage	DC7~24V
Power Connector	DC
Battery Plate	F970/ LP-E6 Dual-purpose Battery Plate
Operating Temperature	-20°C ~ 50°C
Storage Temperature	-30°C ~ 60°C
Install Way	¼-20 thread points (top, bottom, right)
Unit Size	148Lx93Hx20D (mm)
Unit Weight	235g
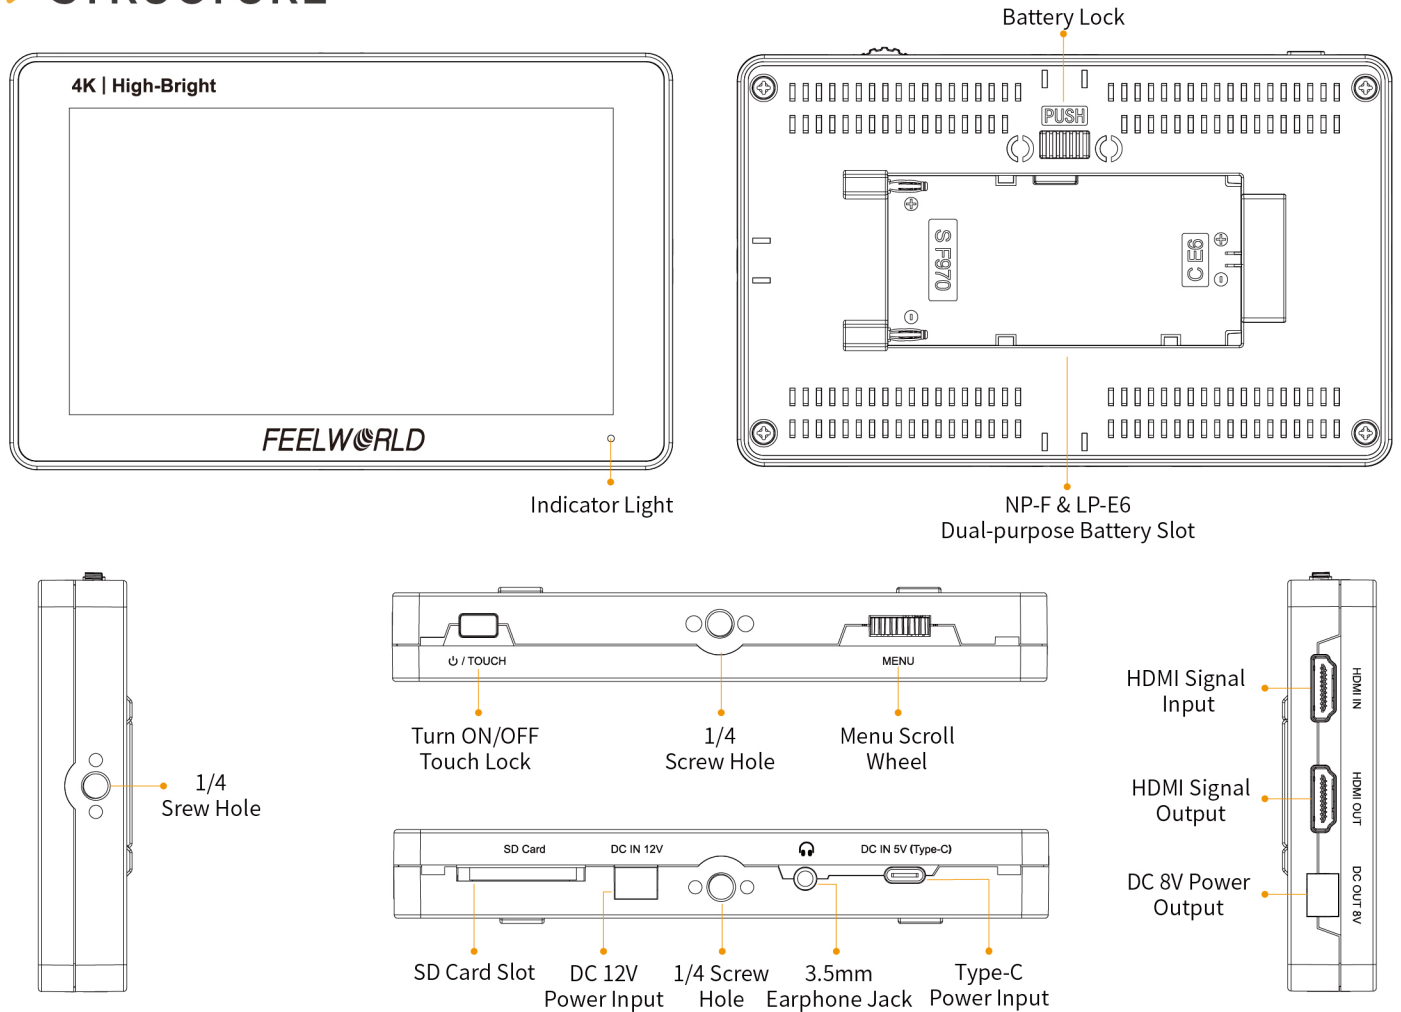
>> STRUCTURE



>> PACKING LIST

 <p>4K High-Bright FEELWORLD</p> <p>Monitor</p>	 <p>Micro HDMI Cable</p>	 <p>Tilt Arm</p>
 <p>Sunshade</p>	 <p>5.5" High Bright Touchscreen Monitor 4K (3840x2160) LCD Touchscreen</p> <p>User Manual</p>	

